


#### AGCO C1000 Display Setup


<sup>1</sup> Connect the RV50 cable to the AGI 4 via the adapter cable and black connector on the back of the receiver




<sup>2</sup> Navigate to the Wrench icon, then System, then Correction level

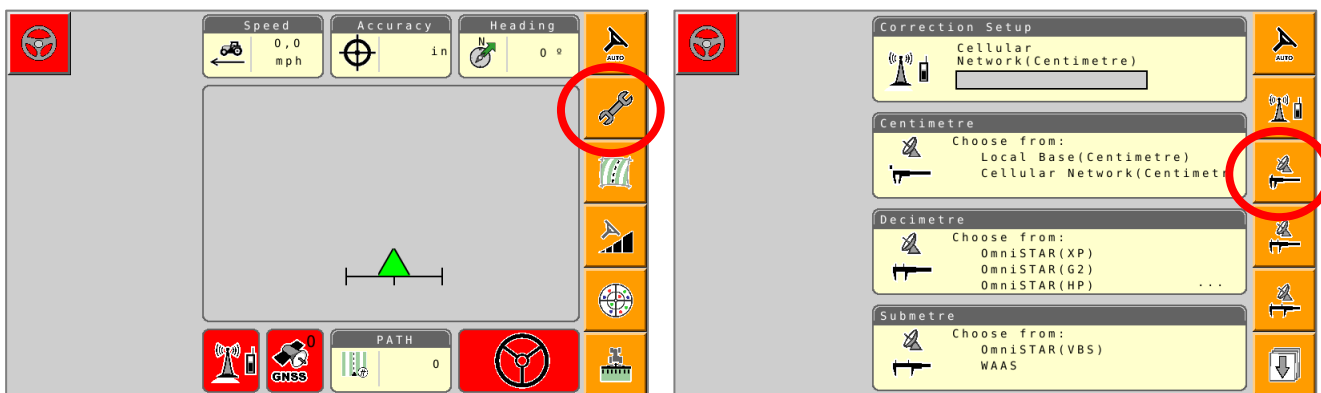

<sup>3</sup> Select Cellular Network; checkmark "Use external radio"; then select the checkmark on the right

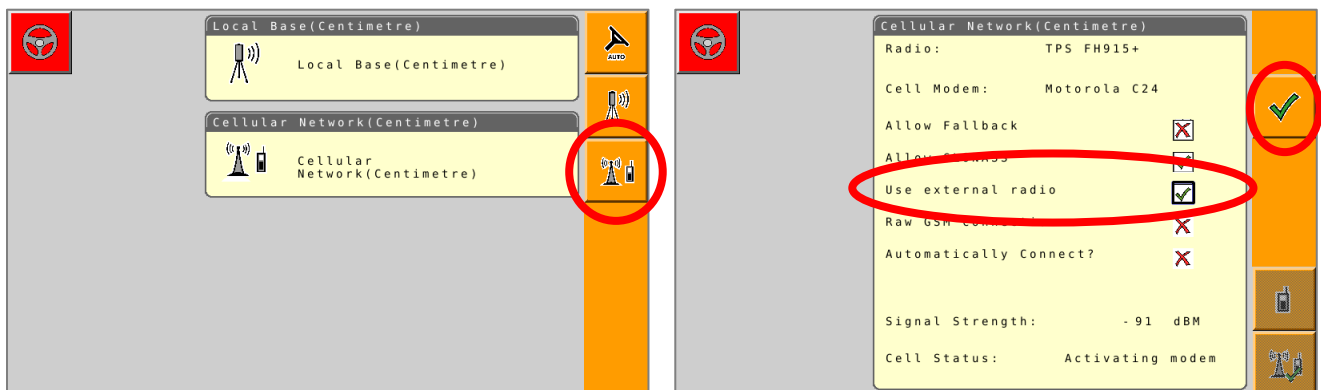

<sup>4</sup> Set the Correction type to "RTCM3.X"; Serial Port to "D"; Baud Rate to match the Beacon; Parity to "None"; & NMEA Rate to 10 seconds

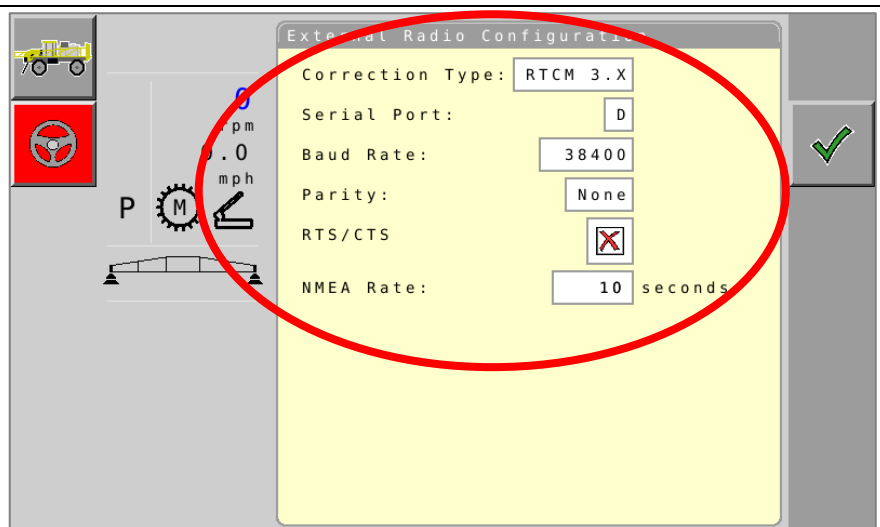

\*Note- If this unit was ordered with a subscription, it will be preprogrammed and plug and play ready.  
The following instructions will not be needed.

Log into the device via WAN static IP (166.XXX.XXX.XXX:8080) or LAN connection (192.168.1.1:8080) on Port 8080.

Username: digifarm

Password: digifarm

You will then be directed to the page shown below. On this page you can select a receiver preset based on the receiver type you have, then enter your username and password. Save device info at the bottom then select the reboot icon at the top of the screen.

### DigiFarm: NTRIP Client Settings Manager

Logged in as: digifarm | [Log Out](#)

Presets  
NovAtel (Raven: RS1, Cruiser II with RTK, 600s, Envizio Pro/Pro II, Viper 4)

Host  
caster.godigifarm.com

Port  
3101

Mount Point  
VBN\_RTCM3\_NOV

Serial Port - Baud Rate  
38400

---

Username

Password

Internal GPS

Manual GPS  
Manual GPS - Latitude (Example: "4043.124436,N")

Manual GPS - Longitude (Example: "9640.586358,W")

[Save Changes](#)

