

TopCon X30 & AGCO C3000 Display Setup

¹ Connect the Beacon to the AGI 4 with the adapter cable & black connector on the back of the receiver



² Navigate to the Wrench icon
³ Select System; then GPS; then Correction
⁴ Configure the GPS correction source page according to the screenshot




⁵ Return to the Run screen to confirm RTK fix




Android Quick Reference Card

Note: Not all android devices function the same; please try your device before purchasing.


1 Pair the Beacon with android device




2 Download the **DigiFarm NTRIP Client** app, open it, and select the gear in the top right corner

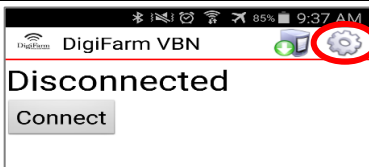


3 Select receiver settings, then receiver connection

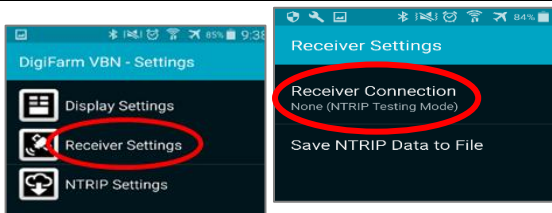


4 Select external via Bluetooth, then choose Bluetooth device

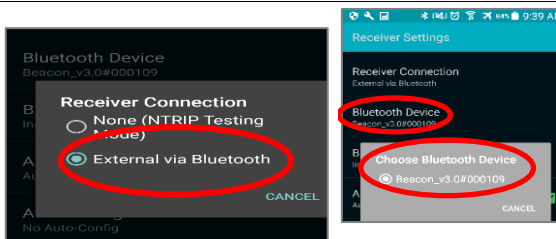

5 Check auto-enable Bluetooth box, then go back & select NTRIP Settings

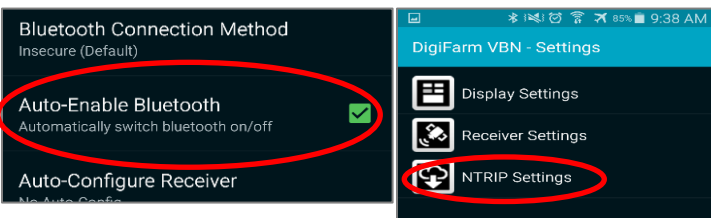


6 Select Network protocol NTRIP v1.0, Caster Port 3101, enter your username & password from DigiFarm; download source table; and get from external receiver

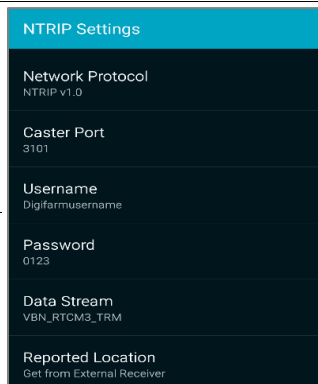


7 Return to the app home screen & tap Connect; the mountpoint list will appear—select the correct one; once selected, the app will start streaming RTK data automatically

iOS Quick Reference Card


1 Pair the Beacon with the IOS device via the settings app

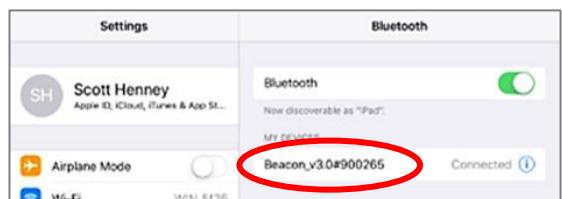

2 Download the **DigiFarm NTRIP Client** app, open it, and allow notifications



3 Confirm Beacon connection within the app; then select your receiver type; & enter your username & password

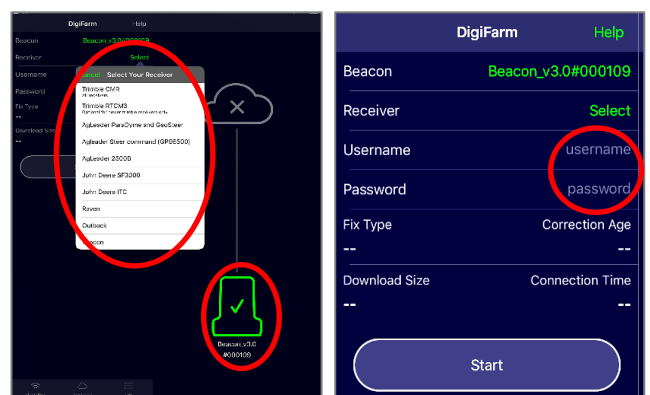

4 Tap the green Start button and allow location access, then you will start streaming RTK data

