

#### AGCO C3000 Display Setup


<sup>1</sup> Connect the RV50 cable to the AGI 4 via the adapter cable and black connector on the back of the receiver



<sup>2</sup> Navigate to the Wrench icon, then System, then GPS, then Correction; configure the GPS correction source page to match the screenshot:



<sup>3</sup> Return to the Run screen to confirm RTK fix as in the screenshot:

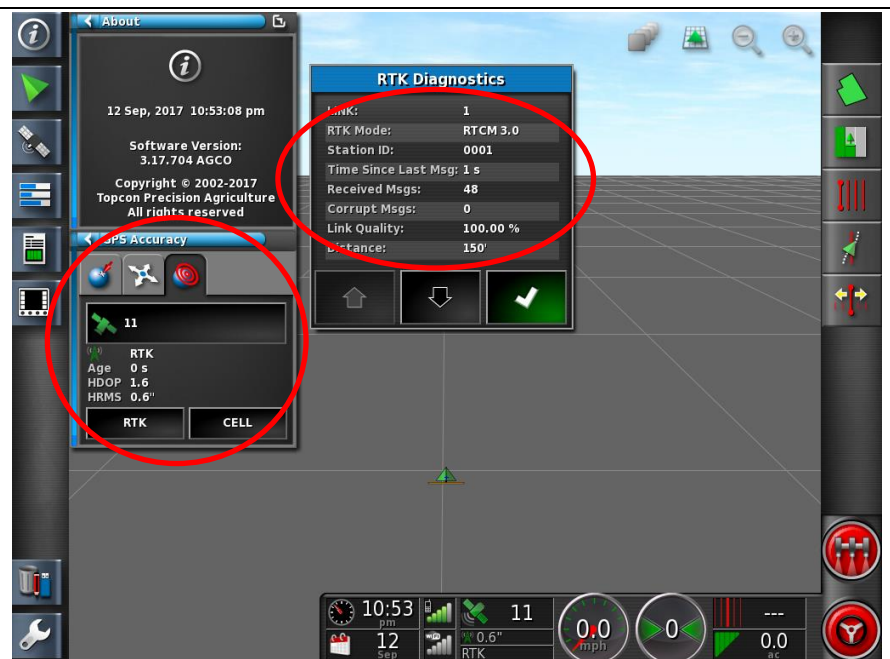

## Quick Reference Card

### AGCO C3000 & TopCon X30 & RV50

\*Note- If this unit was ordered with a subscription, it will be preprogrammed and plug and play ready.

The following instructions will not be needed.

Log into the device via WAN static IP (166.XXX.XXX.XXX:8080) or LAN connection (192.168.1.1:8080) on Port 8080.

Username: digifarm

Password: digifarm

You will then be directed to the page shown below. On this page you can select a receiver preset based on the receiver type you have, then enter your username and password. Save device info at the bottom then select the reboot icon at the top of the screen.

### DigiFarm: NTRIP Client Settings Manager

Logged in as: digifarm | [Log Out](#)

Presets

NovAtel (Raven: RS1, Cruiser II with RTK, 600s, Envivio Pro/Pro II, Viper 4)

Host

caster.godigifarm.com

Port

3101

Mount Point

VBN\_RTCM3\_NOV

Serial Port - Baud Rate

38400

Username

Password

Internal GPS

Manual GPS

Manual GPS - Latitude (Example: "4043.124436,N")

Manual GPS - Longitude (Example: "9640.586358,W")

[Save Changes](#)

