

#### AGCO NT03 Display Setup

For	2019 MF8700S
2018 MF8700	2019 MF6700S
2018 CH MT 600E with DataTronic 5	2019 MF7700S
2018 MF8700 with DataTronic 5	


<sup>1</sup> Install the RV50 cable & AGCO adapter. This connection is located on top of the roof in the compartment below the GPS receiver.

<sup>2</sup> On-screen configuration:


From the Home screen, swipe right or left to the Map page; then tap on the map to view the side menu;

then select the Auto icon;

then select the Corrections icon in the Bottom Left

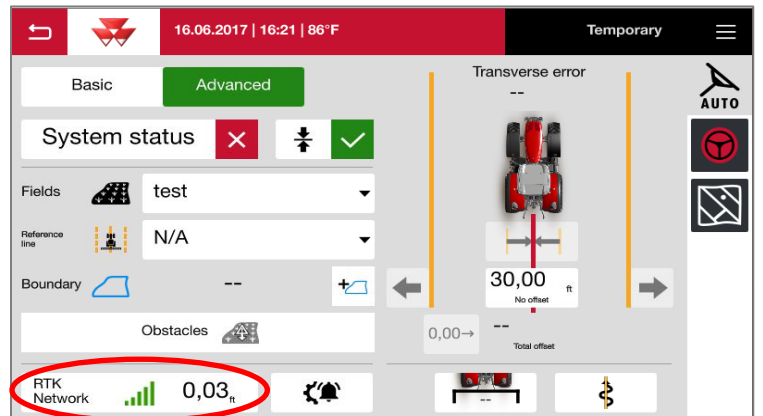

<sup>3</sup> Set the Signal Type to “RTK network”; Modem Type to “External modem”; Transmission speed to match Beacon Baud Rate (38400); Parity to “none”; & Signal format to “RTCM 3.1”

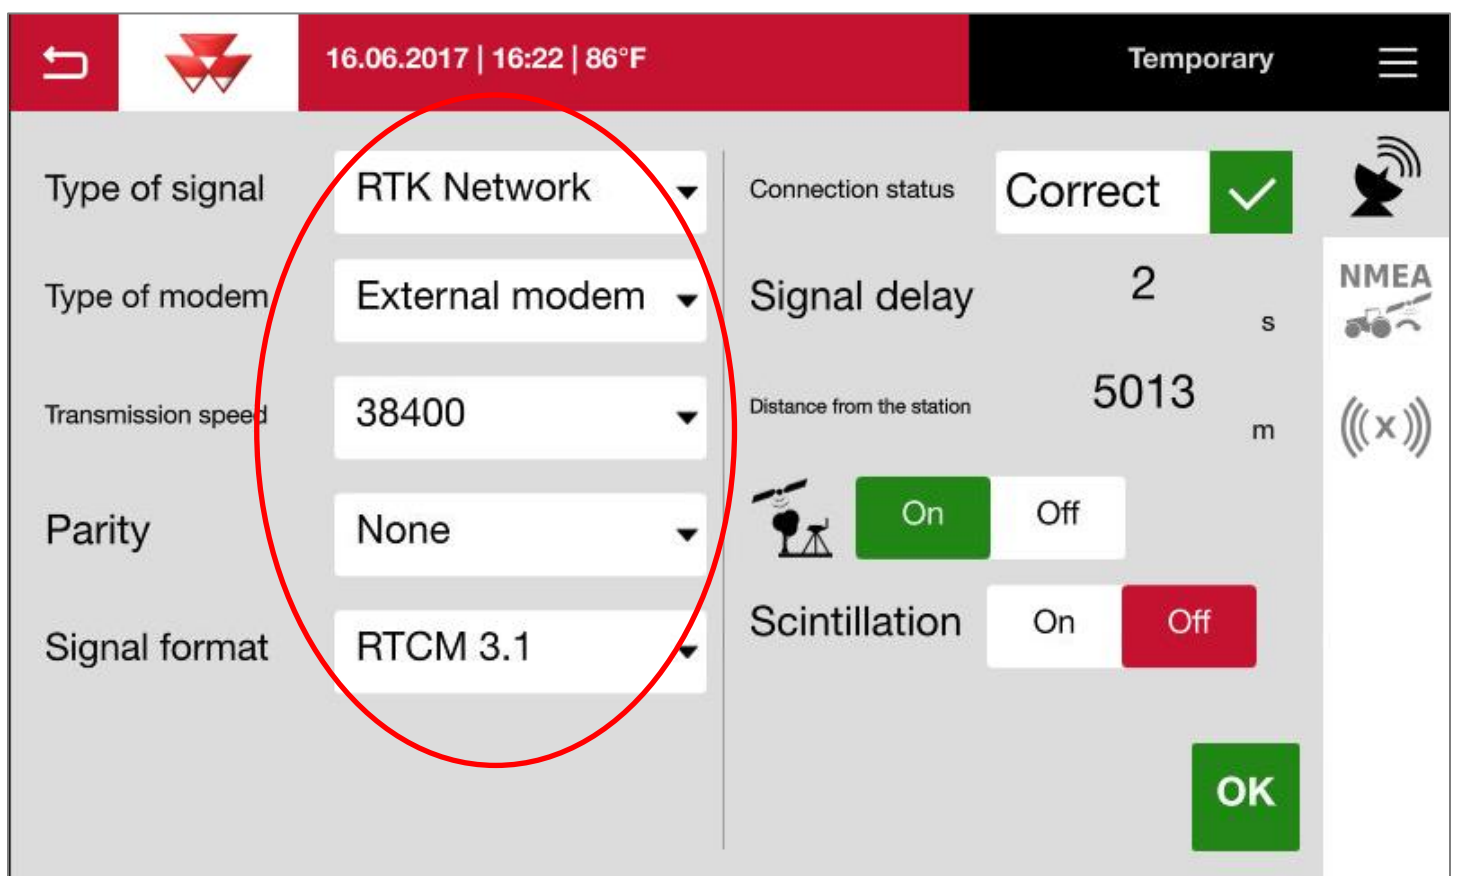



# DigiFarm

## Quick Reference Card

### AGCO NT03 & RV50

\*Note- If this unit was ordered with a subscription, it will be preprogrammed and plug and play ready.

The following instructions will not be needed.

Log into the device via WAN static IP (166.XXX.XXX.XXX:8080) or LAN connection (192.168.1.1:8080) on Port 8080.

Username: digifarm

Password: digifarm

You will then be directed to the page shown below. On this page you can select a receiver preset based on the receiver type you have, then enter your username and password. Save device info at the bottom then select the reboot icon at the top of the screen.

### DigiFarm: NTRIP Client Settings Manager

Logged in as: digifarm | [Log Out](#)

Presets  
NovAtel (Raven: RS1, Cruiser II with RTK, 600s, Envivio Pro/Pro II, Viper 4)

Host  
caster.godigifarm.com

Port  
3101

Mount Point  
VBN\_RTCM3\_NOV

Serial Port - Baud Rate  
38400

Username

Password

Internal GPS

Manual GPS  
Manual GPS - Latitude (Example: "4043.124436,N")

Manual GPS - Longitude (Example: "9640.586358,W")

[Save Changes](#)

