

### TopCon X30 & AGCO C3000 Display Setup


<sup>1</sup> Connect the Beacon to the AGI 4 with the adapter cable & black connector on the back of the receiver



<sup>2</sup> Navigate to the Wrench icon  
<sup>3</sup> Select System; then GPS; then Correction  
<sup>4</sup> Configure the GPS correction source page according to the screenshot



<sup>5</sup> Return to the Run screen to confirm RTK fix

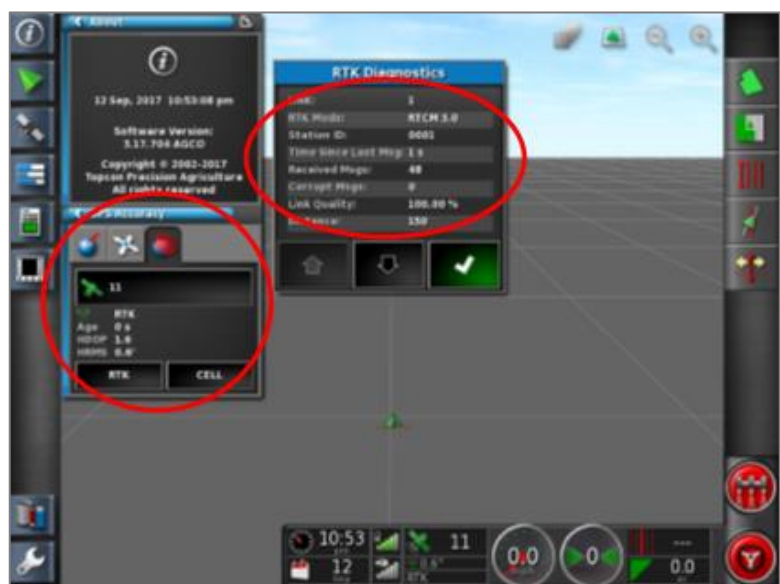



# DigiFarm


## Quick Reference Card TopCon X30 & AGCO C3000 & Beacon

### Android Quick Reference Card


### iOS Quick Reference Card

Note: Not all android devices function the same; please try your device before purchasing.


1 Pair the Beacon with android device




1 Pair the Beacon with the IOS device via the settings app

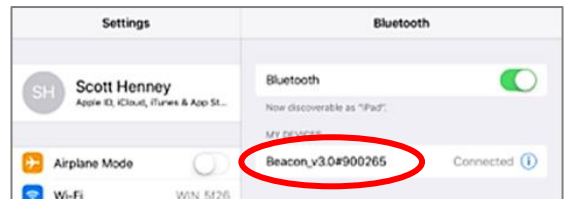


2 Download the DigiFarm NTRIP Client app, open it, and select the gear in the top right corner

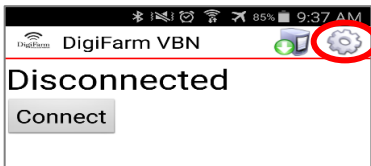


2 Download the DigiFarm NTRIP Client app, open it, and allow notifications




3 Select receiver settings, then receiver connection

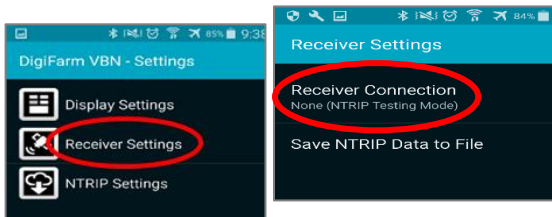


3 Confirm Beacon connection within the app; then select your receiver type; & enter your username & password

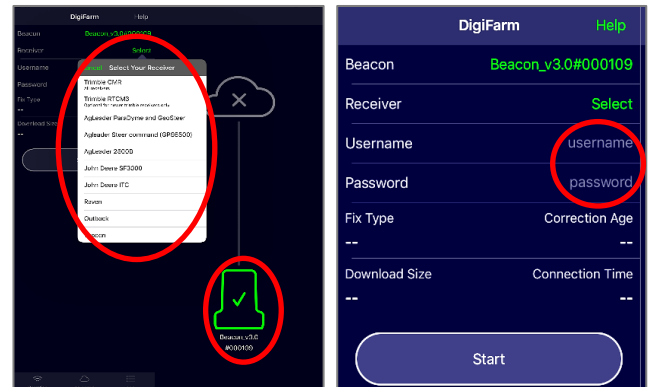


4 Select external via Bluetooth, then choose Bluetooth device

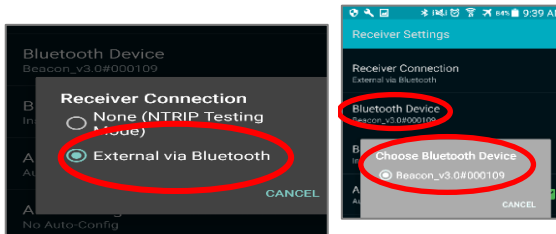


5 Check auto-enable Bluetooth box, then go back & select NTRIP Settings

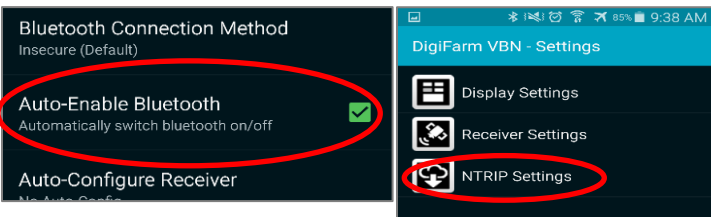

4 Tap the green Start button and allow location access, then you will start streaming RTK data

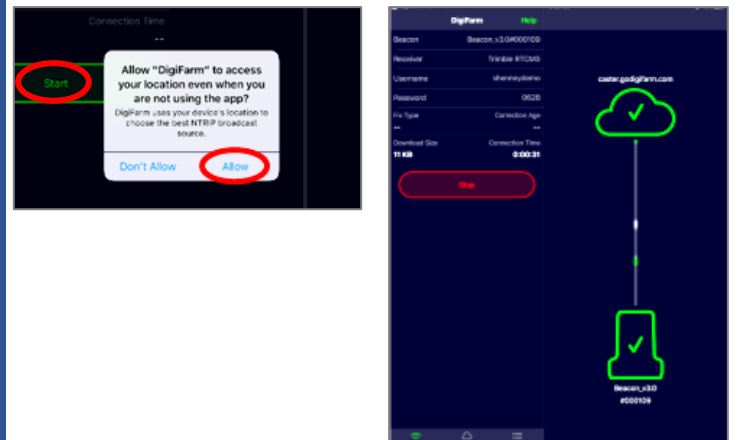

6 Select Network protocol NTRIP v1.0; select your receiver type; enter your DigiFarm username & and password

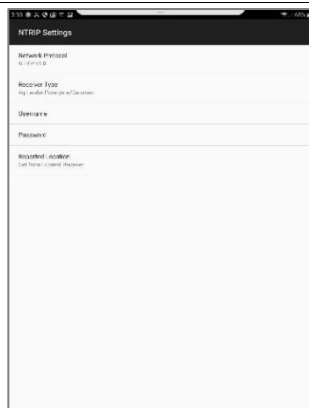

7 Return to the app home screen & tap Connect; the app will start streaming RTK data automatically