

Trimble FMX/ FM-1000


DigiFarm P/N

Gateway Modem to Trimble FMX/FM-1000 – MD3017

Digi Modem to Trimble FMX/FM-1000 – MD1017

DB9 Serial (A)	DTM 12Pin (B)	DTM 12 pin (C)	Color	Description
2	3	-	Brown	RX-(correction data from modem to receiver)
3	-	4	Red	TX- (GPS output from receiver to modem)
5	5	-	Yellow	Signal Ground-Port A
Modem Power (latch on top)	----- ----		----- ---	-----
Bottom Right	8		Black	Power Ground
Bottom Left	9		Blue	12 Volt Power

***modem power (latch on top) is referring to the Gateway modem power plug**

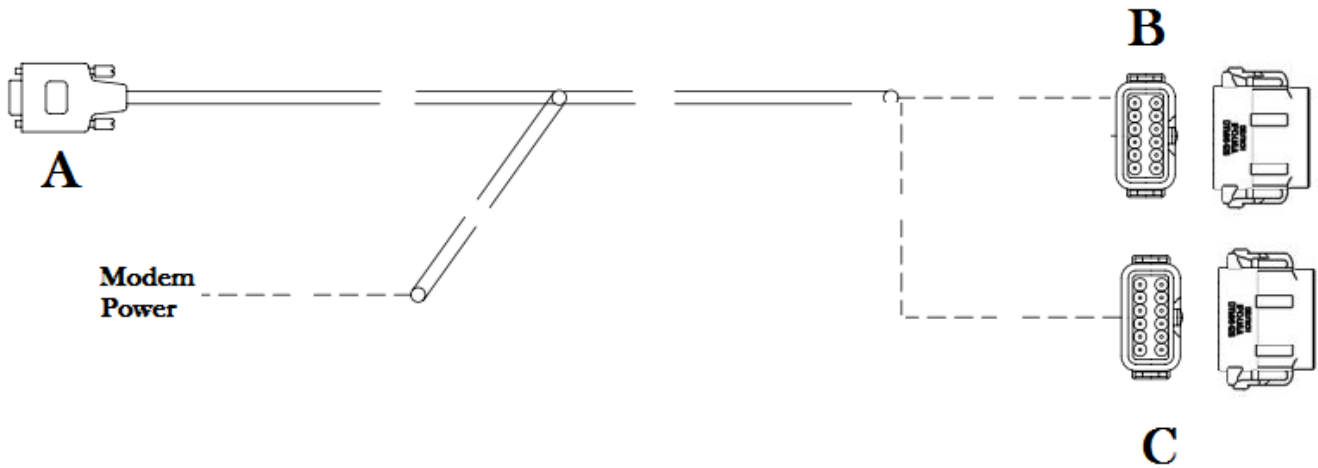

Cable Length 10FT

B – Plugs into FMX Port D

C – Plugs into FMX port A or B for NMEA output

Note: For FMX using Ez-Steer or Ez-Pilot Use the 750 cable P/N: MD3018