


Topcon AG-3 Adapter to Gateway (372 cable) or beacon

DigiFarm P/N BN2016

Topcon Adapter

Bare Wires (A) label	DTM 12Pin (B)	Color	Description
RX	8	Brown	RX-(correction data from modem to receiver)
TX	6	Red	TX- (GPS output from receiver to modem)
GND	5	Yellow	Signal Ground-Port A
12V Power	11	Black	Power Ground
Power GND	10	Blue	12 Volt Power

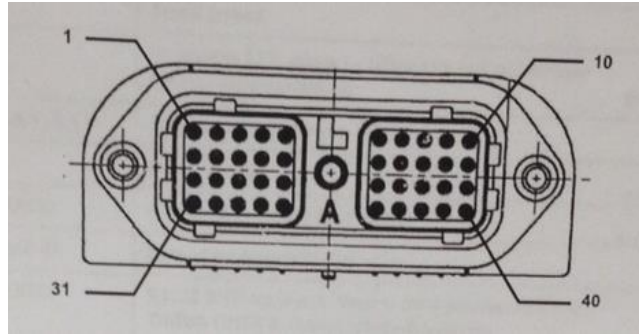

Topcon Wiring for AGI3 and DigiFarm Modems

Color	1 st choice	Alternate pins
Yellow	22	9,14,17,19,21,27,29,31
Red	33	35
Brown	23	23
Blue	20	External power at modem/Beacon
Black	12	9,14,17,19,21,27,29,31